
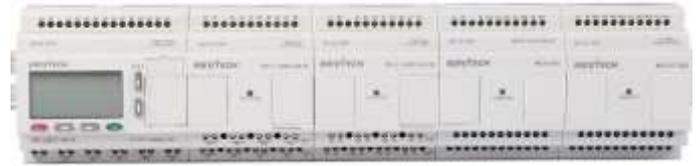


◆ **Technical Data:**

**Model:PR-E-DC-16IN**

**RIEV/TECH**

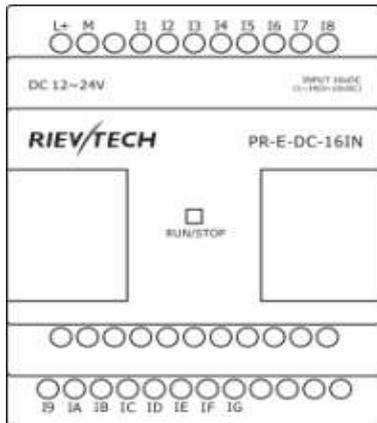

1.16 pcs extensions can be applied to the PR CPUs

2.Connection cable length can be customized(Max. 30 Meters for the distance between the end extension and CPU)

**Technical Index**

<b>Power supply:</b>	
Nominal voltage	DC 12-24V
Operating limits	DC 10.8-28.8V
Immunity from micro power cuts	Typ.5 ms
Max. Startup current	Max. 0.25A
Max. absorbed power	0.7 W (10.8V dc) ; 0.8 W (28.8V dc)
Protection against polarity inversions	Yes
<b>Input parameters:</b>	
Input No	16 ( I1-IG )
Digital input	16 ( I1-IG )
Analogue input	4 ( I1-I4)(0..10V DC)
<b>Digital inputs( I5-IG )</b>	
Input voltage	DC0-28.8V
Input signal0	< 5V DC; <1mA
Input signal1	> 8 V DC;>1.7mA
Input current	2.1mA @ 10.8V dc 2.6mA @ 12.0 V dc 5.2 mA @ 24 V dc 6.3 mA @ 28.8 V dc
Response time	0 to 1 : <1 ms ; 1 to 0 : <1 ms
Maximum counting frequency	4 Hz(I5--IG)
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
<b>Inputs used as digital inputs( I1-I4 )</b>	
Input voltage	DC0-28.8V
Input signal0	< 5V DC;<0.1mA
Input signal1	> 8 V DC;>0.3mA
Input current	0.4mA @ 10.8V dc 0.5mA @ 12.0 V dc 1.2mA @ 24 V dc 1.5mA @ 28.8 V dc

Response time	0 to 1 : Typ. 1.5 ms ; 1 to 0 : Typ. 1.5 ms
Maximum counting frequency	Typ.: 4 HZ
Sensor type	Contact or 3-wire PNP
Input type	Resistive
Isolation between power supply and inputs	None
Isolation between inputs	None
<b>Inputs used as analog inputs( I1-I4 )</b>	
Measurement range	DC 0---10V
Input impedance	Min, 24K $\Omega$ ; Max. 72K $\Omega$
Input voltage	28.8 V DC max
Resolution	9bit ,0.015V
Accuracy at 25 °C	$\pm$ (Max.0.03)V
Accuracy at 55 °C	$\pm$ (Max.0.06)V
Isolation between analog channel and power supply	None
Cable length	10 m max. shielded and twisted
<b>Other parameters:</b>	
Operation temp	-20°C-55°C
Storage temp	-40°C-70°C
Weight	Approx.200g

# Installation Dimensions & Wiring Diagram

